


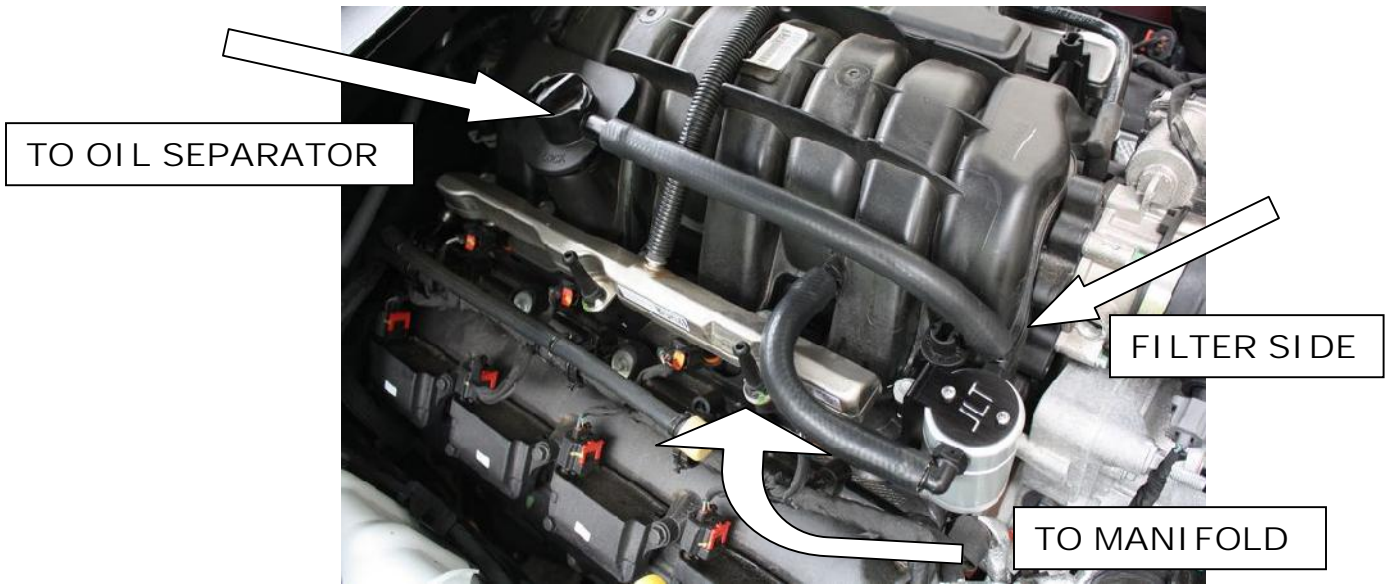


Installation Instructions #3061P  
 JLT 3.0 Oil Separator (2005-17 5.7 Hemi, Passenger Side)

Please review complete instructions prior to installing.

Step#	
1	Verify you have all of the following parts included in the kit: (1) JLT Oil Separator w/fittings, (1) mounting bracket, (2) fine thread machine screws, (1) mounting bolt, (1) aluminum mounting spacer (2) 1/2" Rubber hoses
2	Gather all of the following tools needed for the installation: 13mm socket and ratchet, Phillips screw driver, light oil
3	Remove the factory PCV hose from PCV valve to intake manifold Install mounting bracket to engine using supplied bolt, put spacer between bracket and engine.
4	<div style="display: flex; justify-content: space-around;">   </div> <div style="text-align: center; margin-top: 10px;">  </div>
5&6	<p>Use the 2 supplied fine thread screws to attach the oil separator to the mounting bracket. Mount so the FILTER in the oil separator is on the right side as you look at it and connect the hoses like shown below. Install 12" PCV hose onto PCV valve. Install 7" Hose from can to Intake manifold.</p> <p><b>TIP-</b> Use light oil on hose to help in sliding hose over fittings, hose fits very tight, no clamps will be needed</p>



To properly clean the filter in the Oil Separator, spray any degreaser or solvent through it and let it air dry. Clean it every 10,000 miles.

Thanks for the business. If you have any questions, please e-mail [Info@JLTtruecoldair.com](mailto:Info@JLTtruecoldair.com) or call 757-335-1940. Our hours are Monday-Friday, 8:00am – 5:00pm Eastern Time.

Warranty: JLT Performance Inc. will repair or replace any part of their product found upon our inspection to be defective in workmanship or material within 1 year from the purchase date for the original purchaser.

Disclaimer: JLT Performance Inc. makes no warranties whatsoever, expressed or implied, oral or written to any purchasers, except the warranty above. JLT Performance Inc. hereby specifically excludes from any implied warranty of merchantability or implied warranty of incidental, secondary, or consequential damages of any kind whatsoever. All purchasers and users of products manufactured by JLT Performance Inc. agree to hold harmless and indemnify JLT Performance Inc. from any and all claims arising from their use. Failure to receive notice of any or the limitations contained in this disclaimer shall not serve to extend liability to JLT Performance Inc. for any claims arising out of use of its products.

Return Policy: All returns will be subject to a 10%-25% restocking fee. Please visit [www.JLTtruecoldair.com](http://www.JLTtruecoldair.com) for complete return policy.